

ADDING
INTELLIGENCE TO
SURVEILLANCE
TECHNOLOGY

The Next Generation of TotalVisionTS, the FX . . .

In 2005, IRIS® Digital Video Systems introduced its touch-screen controlled TotalVisionTS, at that time an industry first. It still retains that distinction now as the **TotalVisionTS FX**. The wall-mounted FX-Series of digital video recorders has been enhanced and continues to be unique among its marketplace.


The system remains an easy to install and program unit with no external keyboard and mouse needed. Simply tap the touch-screen with its "on-demand" keyboard, input an optional password, and select the desired function or screen layout. The TV-FX has been enhanced with increased recording speeds, a front-panel mounted USB port, image area motion masking, and includes an embedded operating system as standard.

16-camera configuration is standard, and now for the first time a 32-camera option is available.



Key Features

- Program the system and review images via a 12.1" touch-screen keyboard display.
- New – increased recording speed (4x faster than the original TV16TS!)
- New – by camera, image area motion masking.
- New – user selectable video channel output for remote on-site monitor, with adjustable dwell.
- New - ability to pause live display while recording continues.
- Wall-mounted unit now features a smaller chassis and footprint.
- 16 camera inputs (NTSC or PAL), and 4 transaction data inputs. Optional Video Expansion Module for a total of 32 camera inputs and 8 transaction data inputs.
- Automatic system health maintenance checking (i.e., ATM lighting compliance).
- *FBI Digital Video Recording Procedures* standards compliant.
- Includes the dynamic IRIS Inquiry image review software, allows review by numerous users simultaneously.
- Use either the standard CD/DVD drive or new front-panel mounted USB port for easy export of surveillance images for evidentiary use.
- For increased or redundant storage, RAID is optional.
- "Hot Keys" enable single-touch copy of surveillance images.
- Connects direct to network for recording transaction information.
- Embedded O.S. is standard.
- Recommended for use with an Uninterruptible Power Supply (UPS).

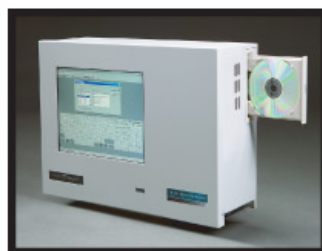


New "Looks" and "Features"



"On-demand" keyboard shown

IRIS Digital Video Systems
10750 Forest Lane
Dallas, Texas 75243
888.451.4646
Fax: 214.349.9429
www.DigitalVideocc.tv

(continued on back)

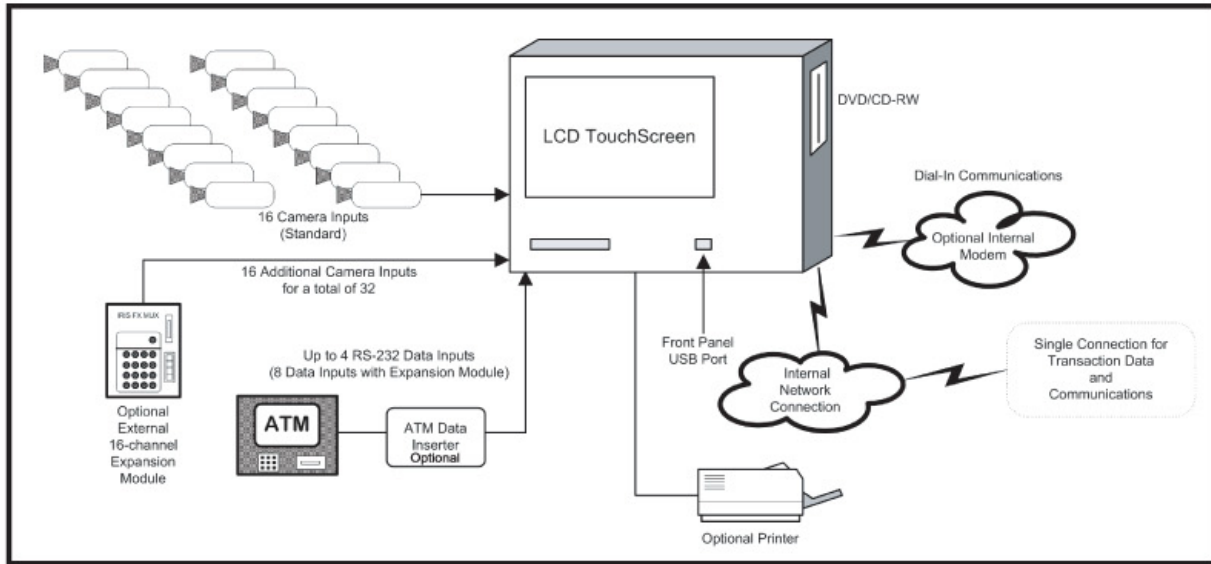

Ordering Information (Contact IRIS or your dealer for a complete listing.)

Part Numbers	Product
3016-FX	Base Model 16-channel TotalVision-FX TouchScreen
3032-FX	Base Model 32-channel TotalVision-FX TouchScreen
300-01	UPS Smart Back-up Power Supply



3032-FX includes Video Expansion Module

Specifications

Video Inputs	Standard 16 BNC, NTSC, or PAL terminated with jumper
Data Inputs	4 data inputs, RJ-45 modular connectors, RS-232 or RS-422 with Transaction Data Inserters
Expansion Module	Adds 16 video channels for a total of 32, and 4 data ports for a total of 8
Alarm Inputs/Outputs	2 inputs, 2 dry SPDT outputs
Video Output	1 EIA STD, 525 line resolution; NTSC or PAL BNC connector – user selected video channel output and adjustable dwell
Data Port	RS-232 – DB9
Hard Drive	Minimum of 750GB Standard, RAID optional
Cooling Fans	3 – 2 thermostatically controlled
Modem Connection	1 – RJ-11 (optional)
Network Connection	1 – RJ-45 Ethernet
Display/Keyboard	12.1" Touch Screen LCD with "on-demand" keyboard
Power Requirement	110VAC, 4A minimum
Operating Range	-5° to +40°C, RH less than 85%, no condensation
Dimensions	17.5"W x 13"H x 6.5"D (allow 7" clearance on right side)
Weight	28 lbs.
Software	IRIS DVS Capture Software IRIS Inquiry Review Software IRIS Service Manager, for remote monitoring of system's health IRIS Access Control, for User access control
Warranty	Two-years depot repair from manufacturer

IRIS manufactured products are RoHS compliant.